Designed to ensure the safety of all passengers in the cabin

Front SRS air bags enhance safety



Front SRS air bags for the driver and front seat passenger deploy in the event of a strong front impact to minimise injury to both driver and front passenger.

*SRS stands for Supplemental Restraint System.

*The SRS air bags are supplementary devices to the seat belts.
The seat belts must be worn at all times.
The front SRS air bags will not deploy in cases of minor impact.

*In the photo shown, the SRS air bags were intentionally deployed to show their function, and the front passenger seat was set to

Advanced crash-safety body

To protect occupants in an accident, the cabin has been made extra-rigid and crushable structures have been used in the body's front and rear sections to absorb impact.

TERIOS takes crash-safety dasign a step further with a structure that disperses the impact energy from a collision throughout the body frame.





Powerful braking performance

Disc brakes (273 mm rotors) ensure outstanding stopping performance. The EBD (Electronic Brake force Distribution) and ABS (Anti-lock Braking System) with brake assist distribute the braking force optimally to the four wheels.

*ABS brake control is not possible when the tyres have exceeded their performance limit. Also, the control distance cannot be shortened.



Three-point ELR front seat belts equipped with pretensioners and force-limiters

In the event of an accident, the pretensioner instantly winds up the seat belt to remove any slack and the force-limiter adjusts the amount of pressure the seat belt applies to the passenger's chests, which both help to mitigate the injuries to the passengers.

Please check with your dealer concerning standard and optional equipment.

Body colours















Dimensions






Innovation for Tomorrow


Specifications

	Engine		1.5 L				
ITEM	Drive		2WD 4WD				/D
	Transmission		5 M/T	/T 4 A/T		5 M/T	
	Grade		DX	DX	SX	DX	SX
Overall length	With soft spare tyre cover	mm	_	4385	_	4385	_
	With semi-hard spare tyre	cover mm	4425	_	4425	_	4425
Overall width	•	mm			1695		
Overall height	Without roof rail	mm		_		1695	_
	With roof rail	mm	1745		_	1745	
Interior length		mm			2440		
Interior width mm			1385				
Interior height mm			1240				
Wheelbase mm			2685				
Track	Front	mm	1445				
	Rear	mm	1460				
Min. road clearance		mm			200		
Min. turning circle	Kerb to kerb	m	10.2				
	Wall to wall	m			10.6		
Kerb weight		kg	1190	1200	1210	1230	1260
Gross vehicle weight		kg			1800		
Seating capacity		Fr:2 2nd:3 3rd:2					
Engine type	1.5 L 3SZ-VE		Petrol, inline 4-cylinder, DOHC, 16-valve, DVVT				
Total displacement		1495					
Bore x stroke mm			72 x 91.8				
Compression ratio			10.0				
Max. output kW/rpm			77/6000				
Max. torque N· m/rpm		140/4400					
Fuel system			EFI (Electronic Fuel Injection)				
Fuel tank capacity litres			50				
Steering type			Rack & pinion				
Transmission	5 M/T		Forward 5-speed manual, all synchromesh				
	4 A/T		Forward 4-speed full automatic				
Transmission gear ratio	5 M/T		1st: 3.769 2nd: 2.045 3rd: 1.376 4th: 1.000 5th: 0.838 Rev: 4.128				
	4 A/T		1st : 2	1st: 2.731 2nd: 1.526 3rd: 1.000 4th: 0.696 Rev.: 2.290			290
Final reduction ratio			5.571	5.8	857	5.5	71
Brake	Front		Disc brakes with booster				
	Rear		Drum brakes, leading and trailing				
Parking brake			Mechanically operating on rear wheels				
Suspension	Front	MacPherson-struts with coil springs					
	Rear		5-link rigid axle with coil springs				
Tyres			215/65R16				
Max. speed		km/h	160		15	55	
Acceleration	0-100 km/h	sec.	12.8	15	5.3	13	.5
	0-400 m	sec.	18.4	19	9.7	18	.9

Note: Daihatsu reserves the right to make changes at any time, without notice, in prices, colours, materials, equipment, specifications and models, and also to discontinue





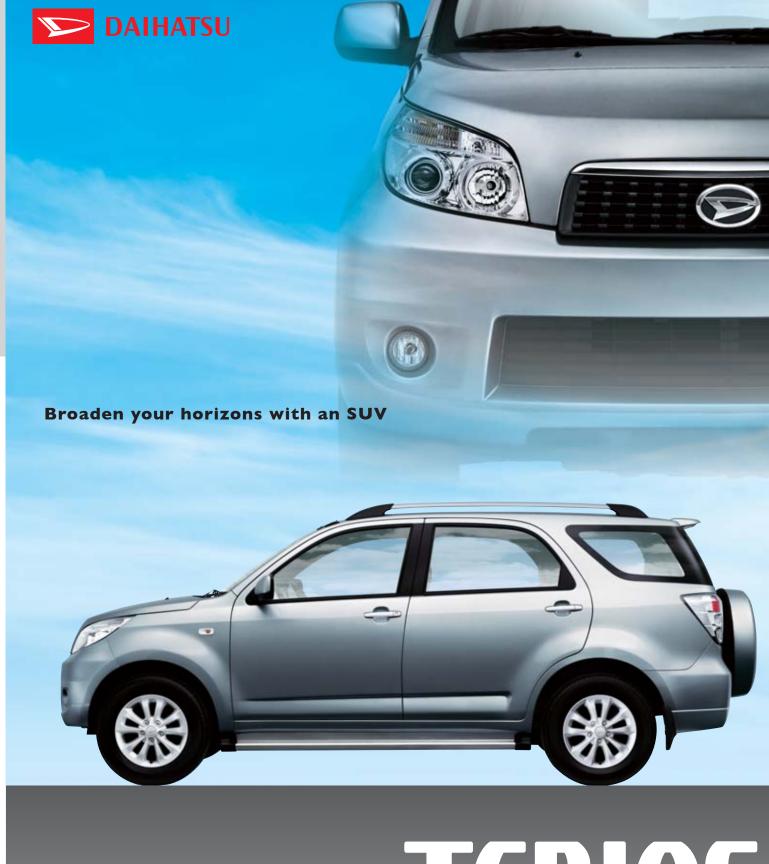

TERIO5

7seater



TERIOS

With an exterior combining sophisticated style with the dynamism of an SUV,

Outstanding performance makes driving exciting, on road and off.

The interior accommodates seven in comfort at all seating positions.

the TERIOS fits perfectly whether you're out in nature or in the heart of the city.

Whether you're driving or just along for the ride, the TERIOS will keep you satisfied.

Outstanding functionality and comfort come together in one incredible vehicle.



Second- and third-row seats can easily be arranged to accommodate various combinations of passengers and luggage.

Second-row seat



The second-row seat makes it easy to get into and out of the vehicle.

The second-row seat can be stowed with a single touch for easy access to the third-row seat. The seat can also be stowed from the third-row seat, ensuring that getting out of the TERIOS is easy.

Third-row seat



The third-row seat can also be stowed to make more room for luggage.

Stowing the third-row seat increases room for luggage to 320 litres (VDA). Don't worry if you suddenly need to fit more in—an easy, two-step process makes stowing the seat a quick and painless affair.



Third-row seatbacks are designed to accommodate a wide variety of vehicle uses.

The third-row seatbacks can be folded down separately to enlarge the cargo space.

Combining quality with functionality

Designed for maximum driver and passenger convenience and comfort, the TERIOS's modern, sporty interior excels in ease of use.










Appealing package delivers comfort whether you're driving or riding.

Features a long cabin design that accommodates seven adults while preserving ease of driving.

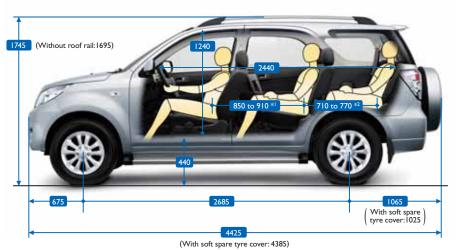

*2: Distance between second-row seat and third-row seat occupar

Spacious front seats The front seats boast room

to spare so that passenger and driver can ride in comfort without bumping elbows, even with adults in both seats.

Wide track for increased stability

The tyres have been moved toward the outside of the vehicle's body for a wider track, creating a combination of driving stability and powerful style.

High eye-point for a

better field of view

enhances vehicle safety.



A high hip-point gives the driver a wide, 36.7° vertical viewing angle. The resulting unobstructed field of view



Level of Performance and Safety that makes TERIOS a Pleasure to Drive

1.5-litre DVVT petrol engine with power to spare.

1.5-litre DVVT engine of the TERIOS has more than enough power to deliver a spirited, satisfying ride. With maximum output of 77/6000 (kW/rpm) and maximum torque of 140 /4400 (N-m/rpm), this engine supplies ample torque at low to mid-rpms and is also able to provide smooth, responsive acceleration at high rpms. You can enjoy an exciting ride whether you're traveling off-road, driving in the city, or cruising at high speeds.

Full-time 4WD system with centre differential lock for superb off-road drivability.

Boasting full-time 4WD and a centre differential lock, TERIOS delivers superb drivability on rough roads, quick acceleration from a standing position, and outstanding high-speed stability. The centre differential prevents occurrence of the "tight corner braking phenomenon."* In thick mud or on a deeply rutted road, just touch a button to switch on the differential lock. This connects the front and rear wheels directly, giving the vehicle better traction.

How the full-time 4WD system with centre differential lock works□

switches the centre differential



pulling out of deep mud, etc

ding high speed cruising



Comfort-optimised suspension

The suspension that supports the TERIOS's driving stability was developed through repeated test-driving on a variety of road surfaces. The result is a suspension system that minimises fatigue as much as possible on long-distance drives and also improves both the comfort of the ride and driving stability.

Built for driving on rough terrain

The front and rear overhangs have been made as short as possible and the ample road clearance give the TERIOS large approach and departure angles. This reduces the damage to the bumpers and undercover when driving in places with high obstacles, such as large stones or when climbing up a rocky hill, etc.



Please check with your dealer concerning standard and optional equipment